

NEW!



POLISH & WAX PRODUCTS



www.winkelgroup.de

What is the **HEAVY CUT COMPOUND 101**?

HEAVY CUT COMPOUND 101 is a strong and fast-acting paste for use on all paint surfaces. The product has been developed for the removal of compound scratches and for use on topcoats. It can be used to remove light to medium scratches, car wash scratches and oxidation.

Depending on the scratch condition before painting; pre-preparations with P1200 or P1500 sandpaper, 1500 or 2000 wet sandpaper depending on the application area are recommended. HEAVY CUT 101, when applied to fine and medium scratches, swirl-type scratches, removes scratches with a single action and brings the paint back to its high gloss.

HEAVY CUT 101, when applied to fine and medium scratches, swirl-type scratches, removes scratches with a single action and brings the paint back to its high gloss.

HEAVY CUT 101, when applied to fine and medium scratches, swirl-type scratches, removes scratches with a single action and

HOW TO USE?

HEAVY CUT 101 is ideal for machine use but can also be used by hand. By Machine: The recommended machine is an electric or air-assisted polishing machine equipped with a Compound Sponge Pad or Wool Compound Pad (1500-2500 rpm). First remove imperfections in the paintwork with suitable sandpaper (micro fine P1500 or P2000) or abrasive disc (P1200 - P1500). Shake the product well before use and apply a sufficient quantity to the surface to be treated. Place the pad on the mixture and spread it before starting the machine. A little dampening of the pad makes application easier. Start polishing at a machine speed of around 1500-2500 revolutions per minute, slowly increasing the pressure up to medium speed. In case of swirl marks and drying of the product, reduce the pressure or humidify the environment. Pay attention to the cleanliness of the pad or cloth used. By hand: Apply the product to the surface to be treated with a clean dry cloth and rub until the scratches disappear. Wetting with water gives a simpler polishing and optimum results. The product may vary depending on the conditions and application; please read the technical data for specific conditions and conditions and seek technical support according to the specific conditions. The instructions and information given are based on tests and experience that we believe to be reliable and are not guaranteed results.

Make your
o



HEAVY CUT COMPOUND 101



Paint dust in vehicle paints
and removes scratches!



Furniture painted or varnished
can be used on surfaces!



With single coat application
perfect result!



Orange Sponge 150 x 25 mm Art. : **W130 203**

101 Heavy Cut Compound Art. : **W130 190**

What is the **HEAVY CUT COMPOUND 102**?

HEAVY CUT COMPOUND 102, is a polishing paste that acts very quickly and strongly on all paint surfaces. It can be used to remove light to medium scratches, car wash scratches and oxidation.

Eliminates the appearance defects caused by medium and deep scratches and polishes the paint. After sanding between P1200 and P3000 depending on the application area, it prepares the ground for use in topcoat paints to remove sanding scratches.

Does not contain silicone or ammonia, easy to clean from the surface. Areas of application is recommended to be divided.

HOW TO USE

According to the Machine: The recommended machine is an electric or air-assisted polishing machine (1500-2000 rpm) equipped with a Compound Sponge Pad or Wool Compound Pad. First remove imperfections in the paintwork with suitable sandpaper (microfine P1500 or P2000) or abrasive disc (P1200 - P2000). Shake the product well before use and apply a sufficient amount to the surface to be treated. Place the pad on the mixture and spread it before starting the machine. A little dampening of the pad facilitates ease of application. Start polishing at a machine speed of around 1500-2500 revolutions per minute, slowly increasing to medium pressure. In case of swirl marks and drying of the product, reduce the pressure or humidify the environment. Pay attention to the cleanliness of the pad or cloth used. If WINKEL HARE REMOVER 301 is used, the pad on the machine should be converted into a high gloss polishing pad to eliminate polish marks and to obtain a glossy surface.

By Hand Apply the product to the surface to be treated with a clean dry cloth and rub until the scratches disappear. Wetting with water gives a simpler polishing and optimum results. The product may vary depending on the conditions and application; please read the technical data for special conditions and conditions and get technical support according to the special conditions.



HEAVY CUT COMPOUND 102



Scratches in worn paint
removes and shines!



Perfect look with one coat
application!



Suitable for gelcoat and
fiberglass surfaces!



Claret Red Sponge 150 x 25 mm Art. : **W130 200**

102 Heavy Cut Compound Art. : **W130 191**

What is the **HEAVY CUT COMPOUND 103**?

FINISHING COMPOUND 103 is an easy-to-use product that gives car paints a new look, high quality long-lasting gloss and protection. It easily removes tar particles and simple scratches on the surface.


Effective on hairline scratches. Can be used with P800 sandpaper. Its water-based formulation supported by emulsified hydrocarbon solvents makes it easy to apply and easy to erase.

It has been specially developed for car paints that have been damaged by sunlight or frequent wear. This product is also suitable for application on all types of surfaces and colored car paint, chrome parts. Boats, caravans and campers are used to achieve an excellent glossy effect.

HOW TO USE

By Machine: The product is applied with a wool pad or in combination with a compounding machine at 1200-2000 rpm. Applying too much product to the surface will result in a heavy layer of product on the surface and may cause workability problems. Therefore, do not leave too much product on the pad. Start polishing with medium pressure (1200 and 2000 rpm.) For an optimal result, before the product starts to dry to the surface gradually reduce the pressure. Wipe the product from the surface with a soft dry polishing cloth and look at your car with a unique shine!

By Hand: Continue until you achieve the original color and shine. Wipe with a clean soft cloth and high gloss will be achieved. The product may vary depending on the conditions and application; please read the technical data for specific conditions and conditions and seek technical support according to the specific conditions. The instructions and information given are based on tests and experience that we believe to be reliable and are not guaranteed results. Make your own test before use.

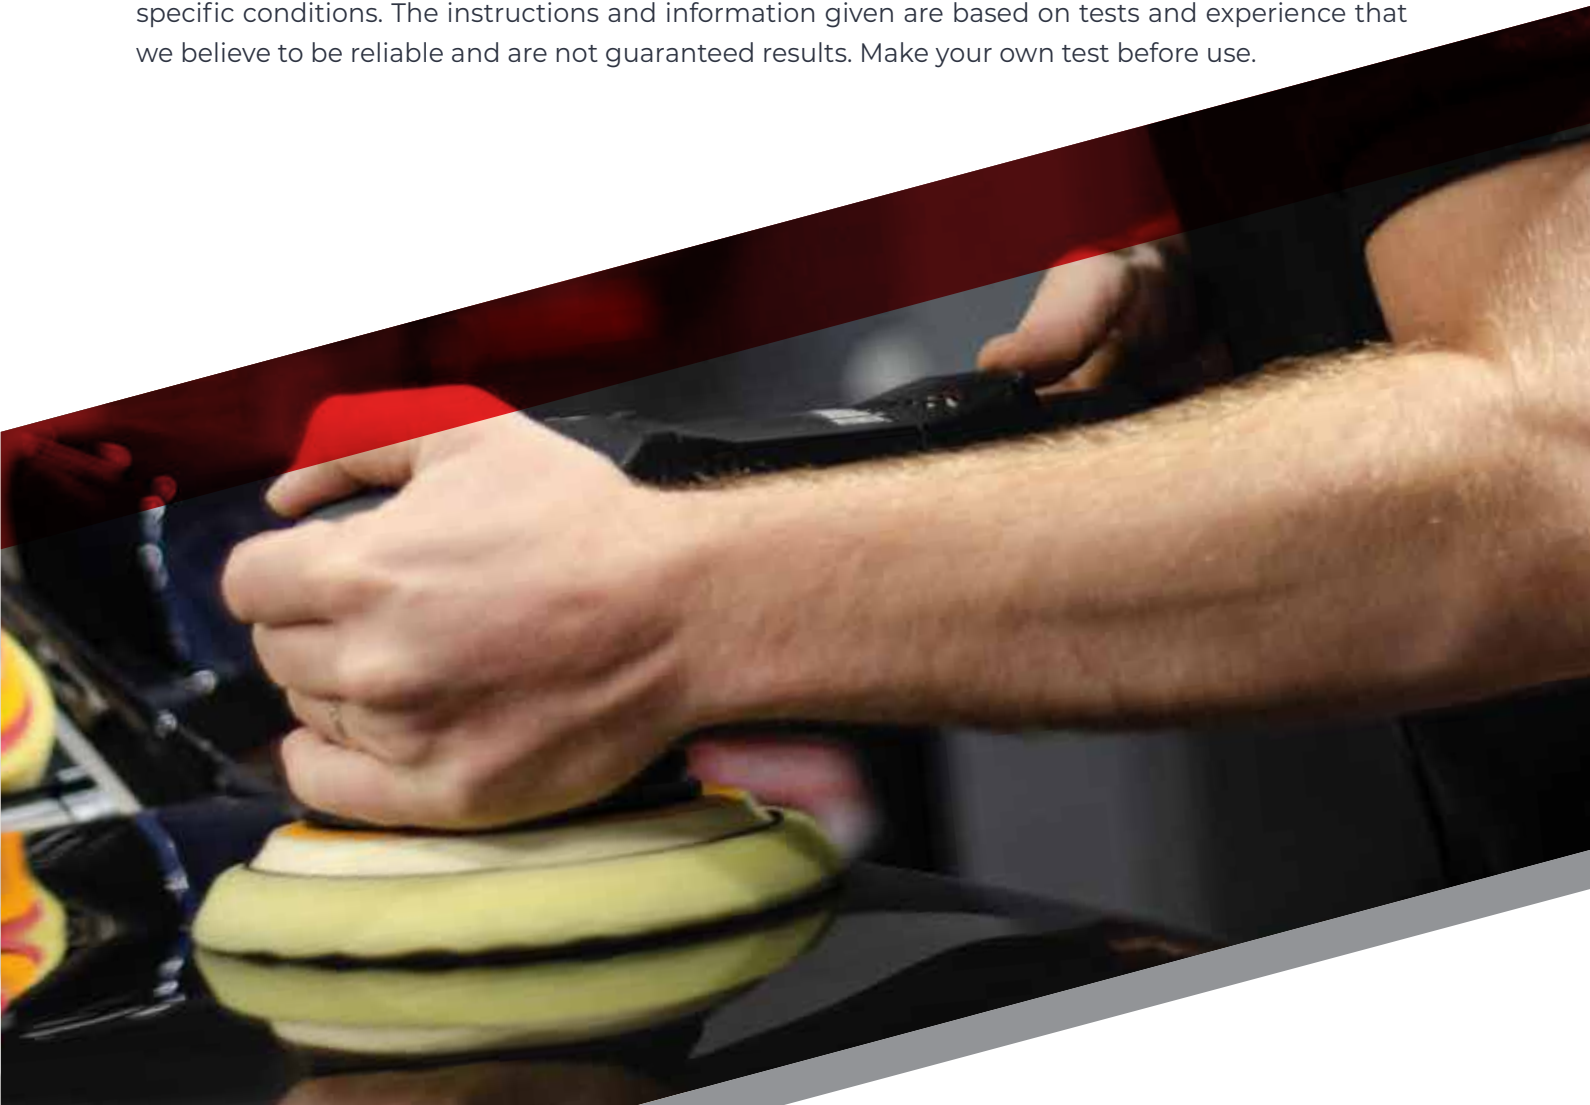

FINISHING COMPOUND 103



High in marine group paints performance!



Caravan and Polyester surface used in paints!



Heavily oxidized coating turns it into a smooth surface.



Suitable for gelcoat and fiberglass surfaces.



Microfiber Pad 160 mm Art. : **W130 204**

103 Finishing Compound Art. : **W130 192**

What is the **POLISH FINE 301**?


POLISH FINE 301, is a glossy polishing paste developed for use on paint surfaces. The product can be used on topcoat paints to remove compound scratches. Eliminates swirl and moiré marks after paste application.

With a complementary effect after the use of WINKEL series 101, 102, 103 gives shine and removes oxidation. It removes deep and medium scratches, covers defects on the paint surface and restores the paint to high gloss.

Removes fine and medium strong scratches caused by dust particles on the paint surface, caused by washing etc. Does not contain silicone, wax or ammonia. Can be used to remove swirl marks. Can be used on all low dark and light paint types.

Kullanım Şekli

By Machine: The recommended machine is an electric or air-assisted (1500-2500 rpm) polishing machine. We recommend shaking the polishing pad and product before use. Apply sufficient material directly onto the paint surface or directly onto the polishing pad when working on vertical surfaces. Put the product on the pad or moisten it with a little damp water before use. Place the pad on the compound before starting the machine and spread it over the surface by placing the machine and pad on the surface. This is to reduce dust or deflection during the polishing start-up phase. Start polishing with light pressure at a maximum machine speed of 1000-1800 revolutions per minute. Re-apply the product if necessary in cases where the polish is on the surface. Towards the end of polishing, reduce the pressure on the machine and buffer to achieve the desired gloss result. Use a clean, soft cloth or polishing cloth to achieve a smooth surface. Remove imperfections in the paint with sandpaper (micro fine 1200 or finer) for polishing when there is no pre-treatment. Apply a sufficient amount of product well before use and on the surface to be treated. It is recommended to moisten the cleaning pad with water before the treatment, which helps to optimize the result. Start polishing with a maximum of 1800 revolutions per minute and use medium pressure. During polishing water to extend the polishing time and optimize the result the surface to make it dry. If the lacquer starts to dry, the product is not removed and reduce the pressure until scratches appear. Achieve a smooth surface Use a clean, soft cloth to wipe the hair.

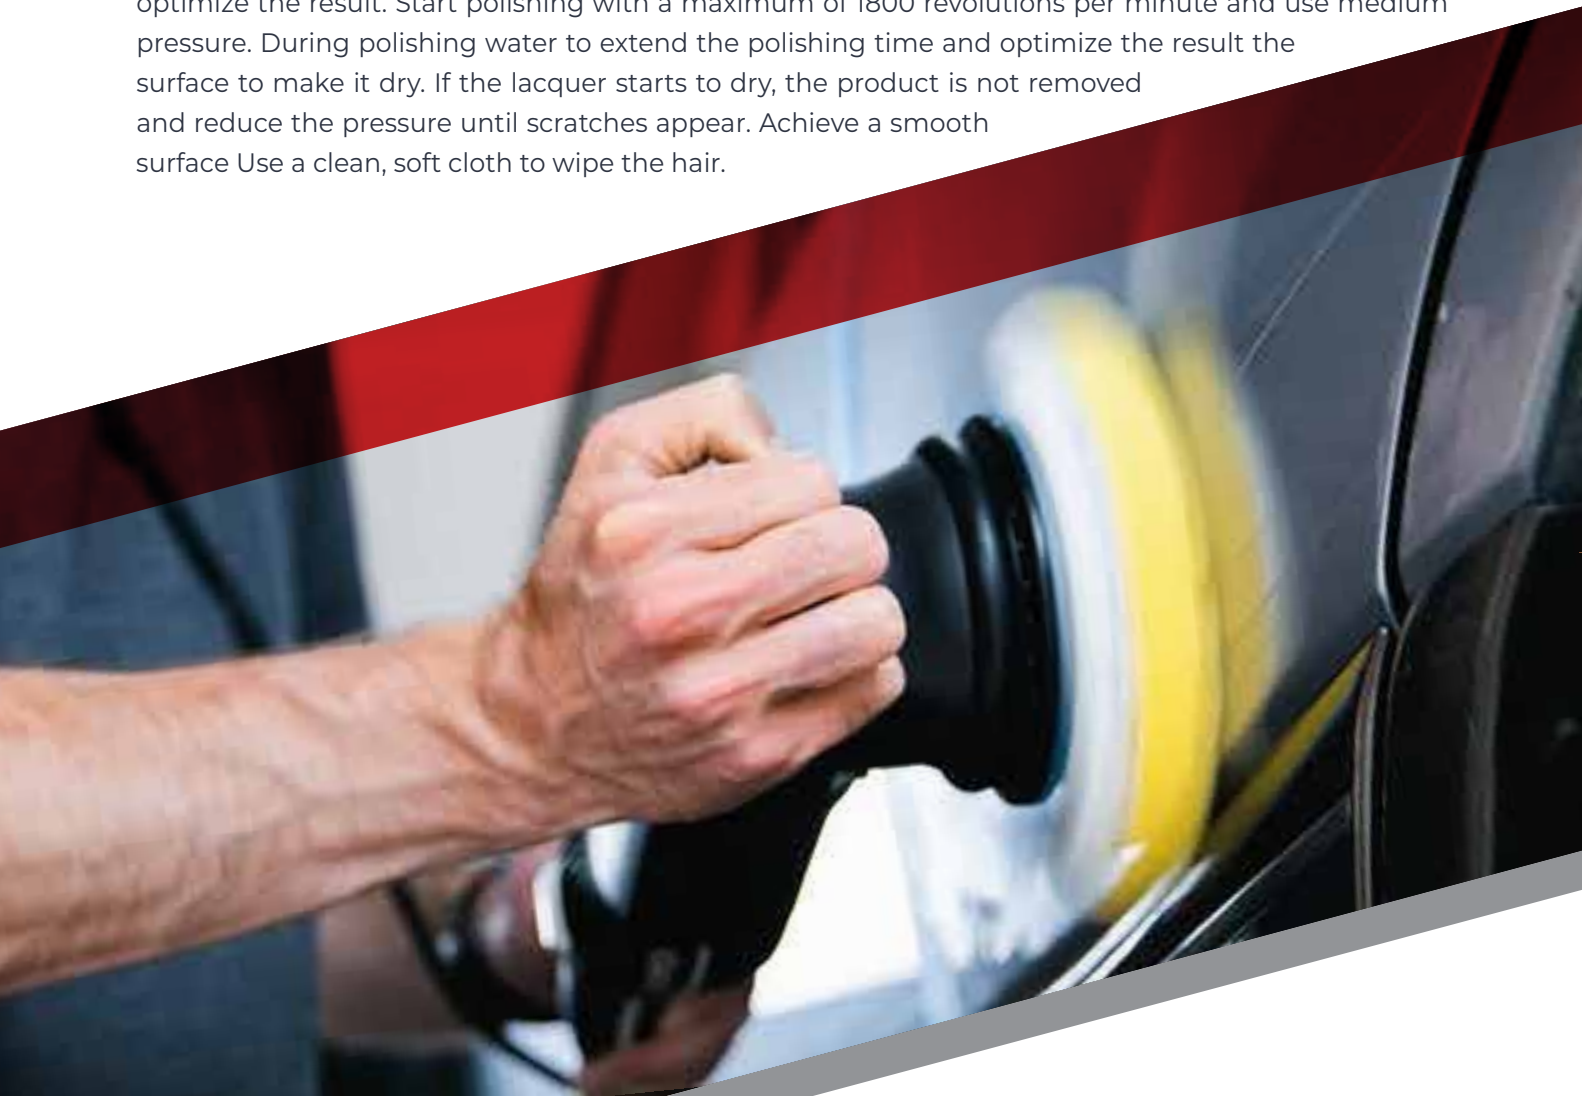

POLISH FINE 301



Removes swirls and moiré after thick paste application!



Removes chalky deposits and scratches!



Gives your car a new look!



Suitable for gelcoat and fiberglass surfaces!



Blue Sponge 150 x 25 mm Art. : **W130 202**

301 Polish Fine Art. : **W130 193**

What is the **HIGHGLOSS WAX 501**?

HIGHGLOSS WAX 501, is a wax based polymer product. With its high performance in the automotive industry, it provides deep gloss and permanent protection in topcoat or original paints. The product, which contains a rich content of non-reactive additives, has been specially developed for the long-term protection of painted vehicle body and parts.

Paint Polishing wax contains PTFE in wax form and reactive weather resistant. It is a product that provides long-term protection against acid rain and industrial dirt. Paint Polishing wax provides deep gloss and smooth surface. The product has a water-based formulation containing emulsified hydrocarbons.

Contains non-volatile silicones. Paint Polishing Polish can be used on all new, old and worn painted surfaces. Do not apply on hot surfaces and in direct sunlight.

HOW TO USE

Shake before use. Apply to clean and dry surfaces. For manual application, apply a small amount of product with a clean soft cloth (e.g. a disposable soft polishing cloth), spreading it in a circular motion over the surface. When the product starts to dry, use a fresh and dry soft polishing cloth in a circular motion to obtain a perfectly shiny surface. The gloss effect depends on the duration of the polishing process, the amount of product applied, the polishing process and the selection of the correct polishing cloth. A polishing cloth saturated with product should be replaced with a new, dry cloth. The product can also be applied by machine. In this case, for example, a double-action sander combined with a foam glass pad can also be used. After applying the product to the surface, a drying time may be required. The product may vary depending on the conditions and application; please read the technical data for specific conditions and circumstances and seek technical support according to the specific conditions. The instructions and information given are based on tests and experience that we believe to be reliable and are not guaranteed results.



HIGHGLOSS WAX 501



Rotary mop for small areas
or apply by hand!



It gives aesthetic shine to the paint!



Your vehicle looks refreshed
and ready to use!



Black Polish Sponge 150 x 25 mm Art. : **W130 201**

501 Highgloss Wax Art. : **W130 194**



www.winkelgroup.de

